

**Certification and Approval**



Certification Code EEx d II 2 G IIB or IIC T6 - T5 or T4 (See lamp tables for T rating)  
 Certification number SIRA 01 ATEX 1033  
 Certification standard EN 60079-0, I  
 Protection IP 66

**Features Options**

Extended life using PL lamps  
 IIC as standard  
 Higher output – smaller fitting  
 50,000 hour electronic ballast

Range of voltages  
 Through wiring  
 IP68 versions  
 Range of mountings

FOR AMBIENT TEMPERATURE “T” RATINGS SEE TABLES AT REAR OF CATALOGUE

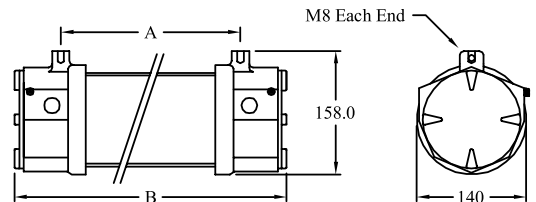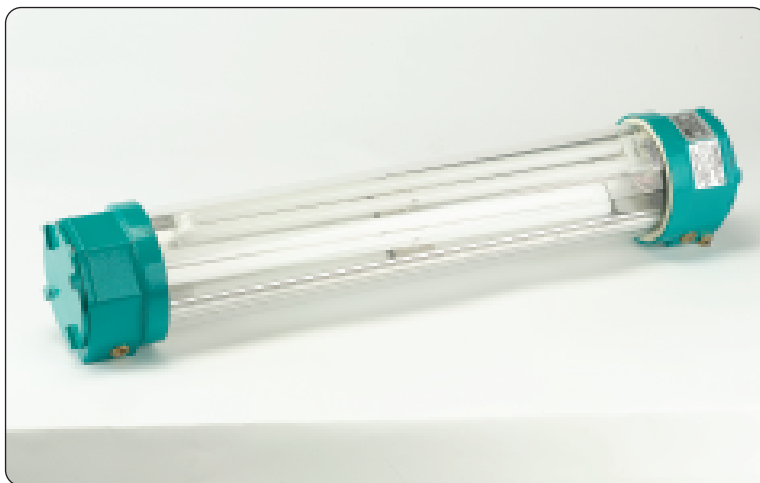


Size	Model	A	B
1	8w	335	448
2	18w	632	752


All dimensions in mm



Gear tray access  
 and amp access

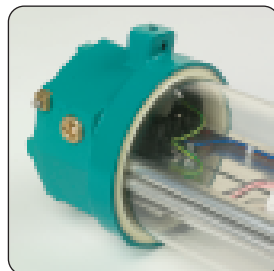

Lamp retaining clips  
 on tray



Through wiring connection  
 plug

## Technical Data

Supply Voltage	230v 50Hz Check for alternative voltages. Suitable for central battery operation.						
Operating Temperature	-25°C to +52°C subject to lamp and ambient temperature combinations						
Control Gear	Electronic instant start, Switch start						
Lamp Options	11w, 18w, 26w, 36w, 55w PL-S, PL-L, PL-C (Lamps not provided)						
Cable Entries	2 x M20 – ISO (1 plugged) as Standard Other threads available.						
Terminals	3 wire and earth. Cable size 4mm <sup>2</sup> max Through wiring option available on 8w to 55w sizes						
Mounting Facility	2 x M8 tapped holes vertical and horizontal at both ends.						
Access	Terminals accessed via threaded end cover as is the gear tray which slides out						
Material	Corrosion resistant marine grade aluminium body and high impact polycarbonate tube.						
Finish	2 Pack epoxy paint on primed surface. Standard colour - Aqua Additional costs for non standard colours						
Weight	<table border="0"> <tr> <td>Size 1</td> <td>11w, 18w, 26w</td> <td>4.5Kgs</td> </tr> <tr> <td>Size 2</td> <td>18w, 26w, 55w,</td> <td>6.8Kgs</td> </tr> </table>	Size 1	11w, 18w, 26w	4.5Kgs	Size 2	18w, 26w, 55w,	6.8Kgs
Size 1	11w, 18w, 26w	4.5Kgs					
Size 2	18w, 26w, 55w,	6.8Kgs					
Features	IIC as standard Heavy duty construction High ambient temperature option available						